




RECORD RIDGWAY TOOLS LTD.,
Sheffield, England

Saw Catalogue

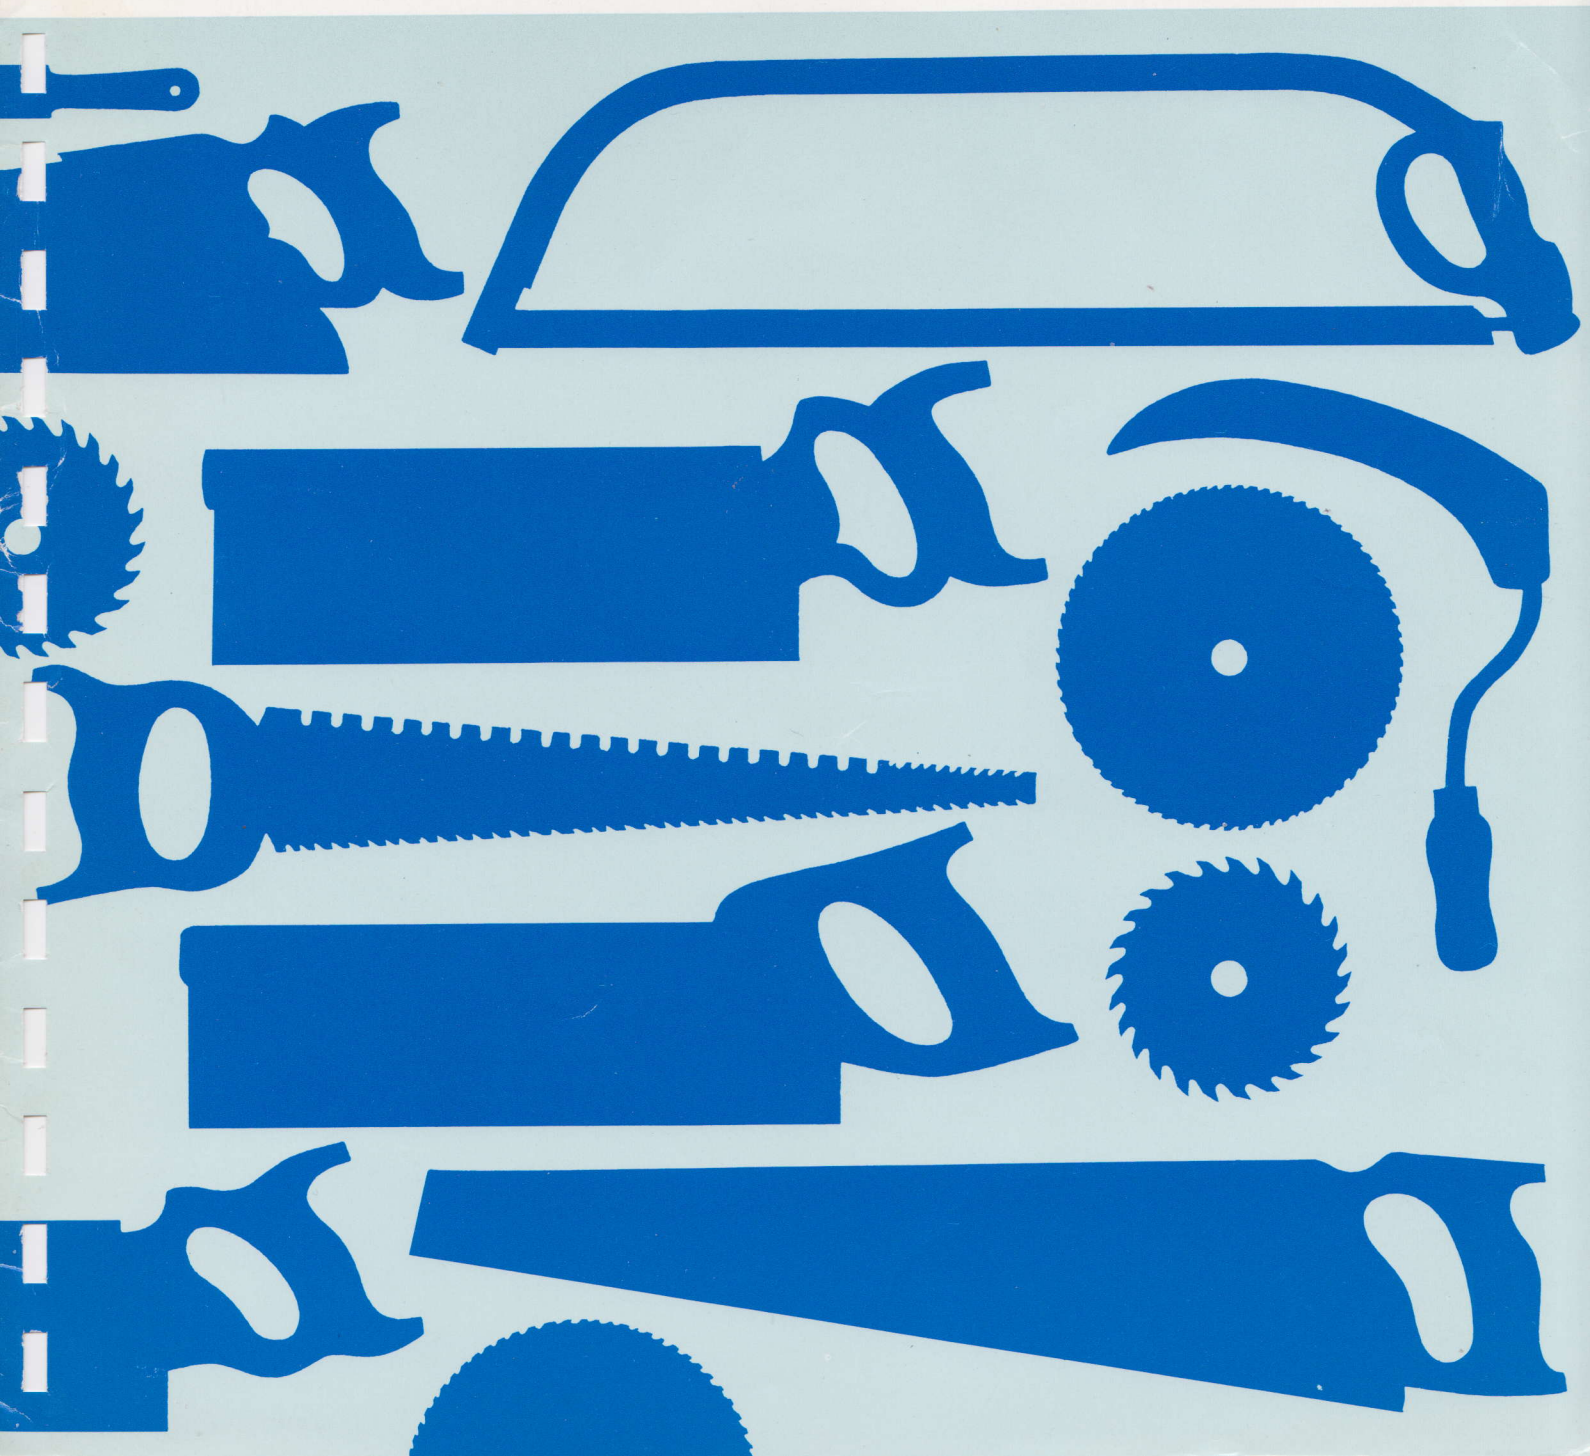

W62



RECORD RECORD TOOLS LTD.
Swindon, England

Catalogue

INTRODUCTION

For over 150 years Tyzack saws have enjoyed a reputation for quality - the quality demanded by professionals using such tools in their daily work; the quality which is now also demanded by the ever-growing number of keen amateur craftsmen who enjoy using fine tools in Do-It-Yourself projects.

Tyzack saws cover a wide range of saw specifications from the De Luxe Nonpareil series to the Tornado series, all offering value for money at different levels of requirement.

Tyzack saws are now an associate brand of Record Ridgway Tools Limited in Great Britain and join the famous Record, Ridgway and Marples brands in offering the most comprehensive range of fine woodworking tools available from one manufacturing source.

PRICES

No prices are printed in this catalogue. For current prices, reference should be made to our latest Price List which is available on request.

GUARANTEE

All Tyzack saws are guaranteed against defect in material or workmanship. Parts proved defective in these respects will be replaced free of charge, but no responsibility can be accepted for consequential damage or expenses.

ORDERS

Orders are accepted subject to the proviso that deliveries may be wholly or partly suspended through delays caused by events beyond our control. To ensure correct identification when specifying Tyzack saws, please state full Tool Number as shown in this catalogue.

COMPLAINTS

Every possible care is given to the final examination and packing of all goods but, should there be any complaint, please notify us at once.

EDUCATION SERVICE

A comprehensive Education Service is offered throughout Great Britain and many educational aids, including wall charts, are available. For full details write to the Record Ridgway Education Department.

TRADE MARKS

The Tyzack Trade Mark is registered in the United Kingdom and abroad. Our rights against infringement will be enforced.

WEIGHTS AND DIMENSIONS

These are given in both pounds/kg and inches/mm and are approximate only.

CARE AND MAINTENANCE OF TYZACK SAWS

Tyzack saws are despatched from the Works ready for immediate use, but, like all cutting tools, they will only continue to provide maximum efficiency if the cutting edge is kept sharp. See sharpening instructions on page 10

TERMS AND CONDITIONS OF SALE

Our full terms and conditions of sale are printed on our price list which is available on request.

CONTENTS

Page	
2-5	Hand Saws
6-7	Tenon Saws
8	Saw Merchandiser
9-10	Display Sheaths
11-13	Special Purpose Saws
14	Circular Saws

HAND SAWS



NONPAREIL No.154

Nonpareil—Without Equal—justifiably describes this superb skew back saw; the professional's first choice.

The glazed and polished blade is taper ground from vacuum teemed nickel chrome alloy steel, hardened and tempered, blocked, tensioned and fully sprung. Teeth are set and sharpened.

The highly polished beech handle is secured with polished brass screws and each saw is individually inspected to our high quality standards.

Sizes	Points per inch
20''(500mm)	10
22''(550mm)	10
24''(600mm)	7.8
26''(650mm)	6.7
26''(650mm)	4½ RIP
26''(650mm)	8 Export only

Each Saw is supplied in a Display Sheath with plastic Tooth Guard and boxed in cartons of 2.



GOLD SEAL NO.160

This exciting Saw was designed for the D.I.Y market by a leading industrial designer.

The straight back glazed and polished blade is made from special saw steel melted and processed in Sheffield, hardened and tempered, tensioned and fully sprung. Teeth are set and sharpened.


The polystyrene handle, which has a 'wood like' feel achieved by introducing a blow agent into the plastic, is securely fastened to the blade.

Selected by the Design Centre for inclusion in Design Index.

Sizes	Points per inch
16''(400mm)	10 Export only
18''(450mm)	10 Export only
20''(500mm)	10 Export only
22''(550mm)	10
24''(600mm)	7
26''(650mm)	7



Supplied in display sheath and packed in cartons of 5.

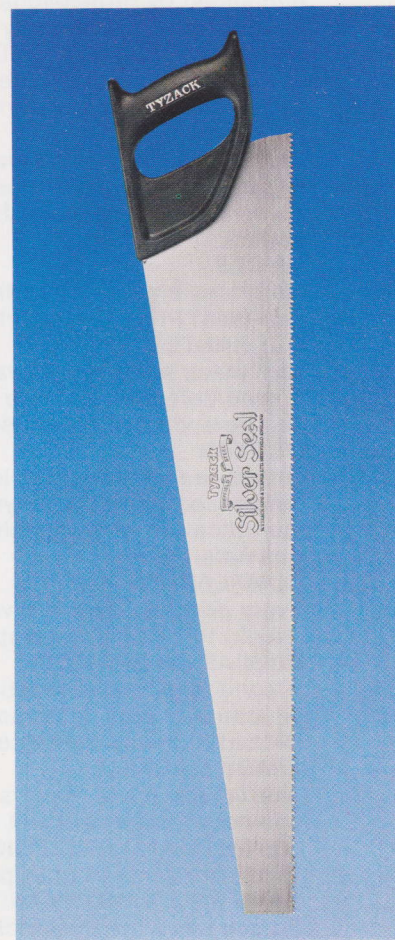

SILVER SEAL NO.260

To cater for the keen amateur. The glazed and polished, hardened and tempered blade is manufactured from fine Sheffield saw steel with teeth precision cut, and set. The superbly styled "stay cool" virtually unbreakable polystyrene handle is securely fitted to the blade.

Sizes	Points per inch
20''(500mm)	10
22''(550mm)	10
24''(600mm)	7
26''(650mm)	7

Supplied in display sheath and packed in cartons of 5.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

HAND SAWS



RED SEAL No.360

An inexpensive straight back saw, with hardened and tempered, finest Sheffield Steel blade, Tyshield coated to help prevent rust and make cutting easier and smoother.

Fitted securely to a superbly styled "stay cool" virtually unbreakable polystyrene handle.

Sizes	Points per inch
16" (400mm)	10 Export only
18" (450mm)	10 Export only
20" (500mm)	10
22" (550mm)	10
24" (600mm)	7
26" (650mm)	7

Supplied in display sheath and packed in cartons of 5.



TEMPEST No.560

Designed to meet a strong and continuing demand for a wooden-handled D.I.Y. Saw at a realistic price. The handle, with its up-to-the-minute styling, is of top quality beech, varnished and lacquer-coated and secured with plated screws. The glazed and polished, hardened and tempered blade is manufactured from Sheffield Saw Steel, with teeth precision cut and set by a revolutionary new process.

Sizes	Points per inch
16"	7 or 10
18"	7 or 10
20"	7 or 10
22"	7 or 10
24"	7
26"	7

(7pts versions of the 16"-22" models are available for Export only).

Supplied in display sheath and packed in cartons of 10.




A FULL LENGTH DISPLAY SHEATH SUPPLIED WITH EVERY TEMPEST SAW.

For maximum point-of-sale impact and protection against damage and rusting. The reverse side features useful hints on sharpening and setting of the teeth and general saw care.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

HAND SAWS

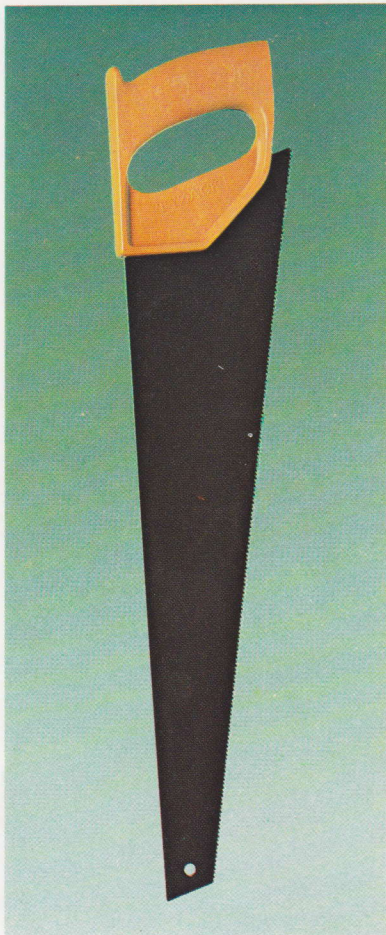

TORNADO No.460

WITH TYSHIELD COATING
World-famous Tyzack quality coupled with an unbelievably low price: these are the primary features of this revolutionary saw.


The 'Tyshield' coating inhibits rusting of the Sheffield Steel blade which incorporates a hanging hole at the end, and the teeth are precision cut and set.

The tough Polystyrene handle, styled for comfort as well as eye appeal, doubles up as a 90°/45° set square.

Sizes	Points per inch
16"	7 or 10
18"	7 or 10
20"	7 or 10
22"	7 or 10
24"	7
26"	7

(7pts versions of the 16"-22" models are available for Export only)

Supplied in display sheath and packed in cartons of 10.

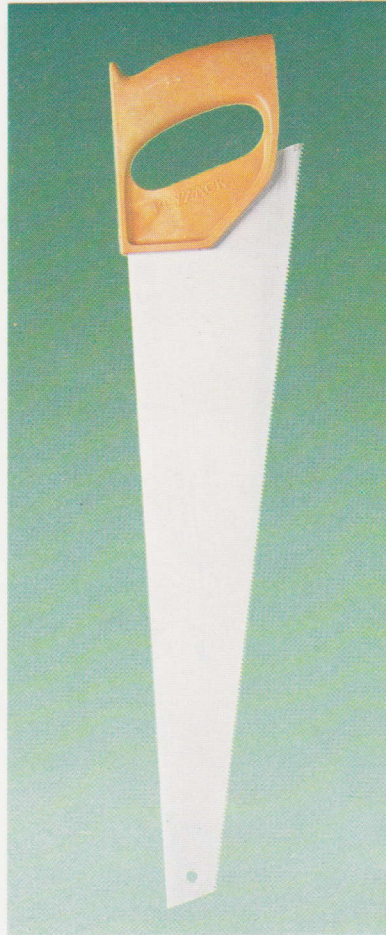

TORNADO No.460

**WITH GLAZED FINISH
(EXPORT MODEL)**

Specification as before but with a traditional glazed blade, designed for export markets.

Also available in the U.K. to special order.

Sizes	Points per inch
16"	7 or 10
18"	7 or 10
20"	7 or 10
22"	7 or 10
24"	7
26"	7

Supplied in display sheath and packed in cartons of 10.



FULL LENGTH DISPLAY SHEATH SUPPLIED WITH EVERY TORNADO SAW.

For maximum point-of-sale impact and protection against damage and rusting. The reverse side features useful hints on sharpening and setting of the teeth and general saw care.



**RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL**

HAND SAWS




NEW TORNADO SQUARE RULE SAW No.490

This new deluxe version of the Tornado Saw has a unique 12"/300mm rule along the top edge of the blade (imperial on one side, metric on the other). The blade itself is manufactured from finest quality Sheffield saw steel and the teeth are precision cut and set with a fine pitch which makes the saw especially suitable for cutting wood laminates, veneers and synthetic materials.

The polypropylene handle which incorporates a 90° and 45° set square, is moulded directly onto the blade for extra rigidity and therefore ensuring total accuracy.

Size 18" (450mm) 10 Points per inch

Supplied in display sheath and packed in cartons of 5.

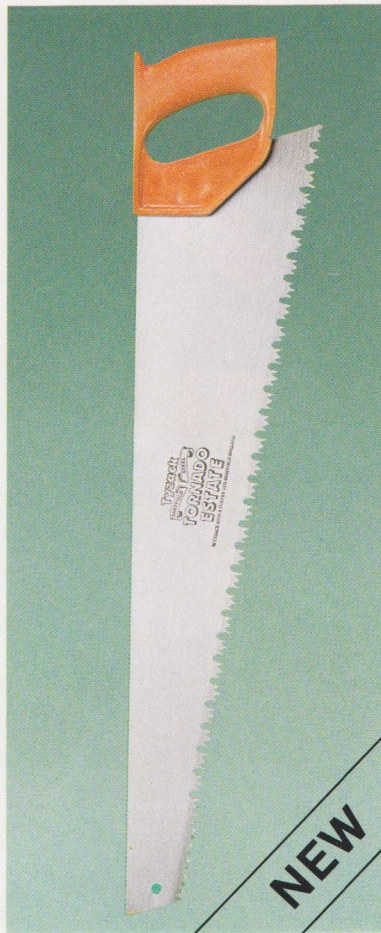

NEW TORNADO — Estate No.470

The latest addition to the Tyzack range of special purpose saws — this one is designed for garden and estate use.

The straight backed Sheffield steel blade is glazed and polished. Machine sharpened teeth conform to the highly efficient American 'lightning' pattern.

Special features include: tough polystyrene handle moulded directly onto the blade for extra strength and rigidity, and a hanging hole at the end of the blade.

Size 24" (600mm) Lightning tooth pattern.

Supplied with plastic tooth guard and packed in cartons of 5.



NEW TORNADO — Builders No.480

A new straight backed saw designed to withstand rough usage on building sites.

The blade is made from Sheffield saw steel hardened and tempered and glazed finished. The 480 has precision cut and set teeth of rip pattern.

Size 26" (650mm) 4½ Rip tooth pattern.

Supplied with plastic tooth guard and packed in cartons of 5.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

TENON SAWS



NONPAREIL No.120

As the companion to our No. 154 hand saw this superb brass back saw is again — Nonpareil.

The glazed and highly polished blade is hardened and tempered, fully tensioned and stiffened with a hand polished heavyweight brass back. Teeth are set and sharpened.

The polished beech handle is secured with three brass screws and each saw is individually inspected to our high quality standards.

Sizes	Points per inch
8"(200mm)	20*
10"(250mm)	15
12"(300mm)	15
14"(350mm)	13

*Dovetail Blade

Each Saw is supplied in a Display Sheath with Plastic Tooth Guard and boxed in cartons of 2.



GOLD SEAL No.161 and 162

The Gold Seal back saw forms a matching set with the Gold Seal hand saw.

The glazed and polished blade is hardened and tempered from special saw steel melted and processed in Sheffield.

Teeth are set and sharpened and a 'wood like' polystyrene handle is secured to the blade.

In the case of the No. 161 the blade is stiffened with a heavy brass back and in the case of the No. 162 a steel back.

Selected by the Design Centre for inclusion in Design Index.

Sizes	Points per inch
10"(250mm)	13
12"(300mm)	13

Supplied in display sheath and packed in cartons of 5.



SILVER SEAL No.261

Companion to the 260 Handsaw the glazed and polished blade is hardened and tempered from fine Sheffield saw steel and stiffened with a heavy steel back. Teeth are precision cut and set.

The "stay cool" polystyrene handle is securely fitted to the blade.

Sizes	Points per inch
10"(250mm)	13
12"(300mm)	13

Supplied in display sheath and packed in cartons of 5.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

TENON SAWS



RED SEAL No.361

As working partner to the Red Seal Handsaw, the No. 361 has a hardened and tempered Sheffield Steel blade stiffened with a heavy steel back and Tyshield coated to help prevent rust and make cutting easier and smoother.

The superbly styled "stay cool" virtually unbreakable polystyrene handle is fitted securely to the blade.

Sizes	Points per inch
10"(250mm)	13
12"(300mm)	13

Supplied in display sheath and packed in cartons of 5.



TEMPEST No. 561

The natural companion to the 'Tempest' Hand Saw. Varnished and lacquered beech wood handle, with plated securing screws. The Sheffield Steel blade with its precision cut and set teeth is stiffened with a heavy steel back.

Sizes	Points per inch
10"	13
12"	13

Supplied in display sheath and packed in cartons of 5.



TUTOR SAW No.15B

Designed in consultation with handicraft teachers this dovetail saw has a brass backed Sheffield blade. The teeth are set and sharpened and the open beechwood handle is secured by two screws.

Size	Points per inch
8"(200mm)	15

Supplied complete with plastic tooth guard and packed in cartons of 6.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

SAW MERCHANDISER

PACKAGE DEAL SAW MERCHANDISER —

The Merchandiser is supplied free with
any of the following quantities of Saws:
10 × Nonpareil (Hand Saws, Tenon Saws
or mixed)

or

15 × Gold Seal

or

20 × Silver Seal

or

25 × Red Seal

or

25 × Tempest

or

45 × Tornado

Alternatively, in order to qualify for a free
Merchandiser, a mixture of all six of the
above models may be selected subject to
the minimum value terms as specified in
the current Hand Tools Price List.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

Tyzack adds a bit of **COLOUR** to your sales

With attention-grabbing new packaging.
Packaging that's practical... that protects... that sells... which means more profit for you!



For even more effective point-of-sale the Tyzack Saw Merchandiser is available with special package deals. Ask your Tyzack representative for details.

- + Powerful point-of-sale impact
 - + Will generate greater sales
 - + Main selling features highlighted on each sheath
 - + Practical packaging that protects. Advise your customer to retain the sheath to store his saw in after use.
 - + Saw care guide printed on every sheath
- Add up to TYZACK'S NEW SELLING PACKAGE.



WE RECOMMEND THAT YOU RETAIN THIS INFORMATIVE SHEATH AND KEEP YOUR SAW IN IT WHEN NOT IN USE.

RECONDITIONING Well-used saws may need some reconditioning before they can be re-sharpened. Reconditioning involves three simple operations which you can easily do at home with a little patience and care.



1. TOPPING


In use some teeth wear more than others and topping corrects any unevenness. Place the saw in a vice and using an 8 or 10 inch flat mill file, a straight wedge and block, file the blade gently to restore a straight cutting edge. If there is any danger of filing away a complete tooth re-shape the saw first.

2. SHAPING

This operation restores the uniform shape and size of the teeth. Select a double-edged taper saw file twice the width of the original tooth depth. Fix the saw firmly in a vice and place the file at right angles in the gullet between the teeth. Gently file each gullet until the teeth assume their characteristic shape.

3. SETTING



Saw teeth have a set to give a cut slightly wider than the thickness of the blade, to allow clearance for the blade to follow through the cut. Each tooth is bent outwards alternatively, and equally, to not more than half the depth of the tooth. Alternatively to around 1½ times the width of the blade. For the resetting of saw teeth we recommend use of the Eclipse Saw Set, specifically developed to reset the teeth of most popular wood saws (4-12 points per inch, with the exception of hard point saws). In one smooth progressive movement the tool first grips the saw, then accurately sets the tip of each individual tooth without subjecting it to unnecessary strain.



GENERAL CARE OF YOUR SAW Your saw needs careful use if it is to retain its fine cutting edge. The first sign of wear is the dulling of the teeth (loss of bite). If you take this as a timely reminder to re-sharpen you will probably avoid having to overhaul the saw. A sheath helps protect all saws against accidental damage and on uncoated saws provides a degree of protection against rust.

4. SHARPENING

If no re-conditioning is necessary the saw sharpening process begins here. First select a saw file to suit the size of the teeth — in practice slightly wider than twice the depth of the teeth. Fix the saw firmly in a vice and hold the file at an angle towards the jaws and the file at an angle protruding above the handle (for crosscut saws to be used on soft woods, the angle should be 45°; for all rip saws 90°). Working from the end gently file the front edge of the first tooth set away from you, and then the back edge of the tooth set towards you.

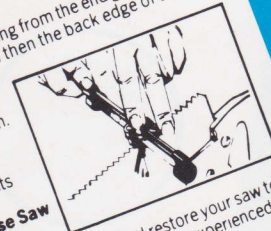

When you have given each tooth four light strokes, reverse the saw and repeat the operation. It is important to hold the file at a steady angle throughout, and to file with light pressure only. Four light sharpening strokes give better results than two heavy ones.


Alternatively we recommend the Eclipse Saw Sharpener, a revolutionary tool developed to overcome the problems associated with saw sharpening. It will accurately sharpen each individual tooth and restore your saw to the performance level it had when it left our factory. Even the most inexperienced user can achieve a professional finish.

The Eclipse Saw Sharpener is unsuitable for use on 4 ½ points per inch Rip Saws.



Record Ridgway Tools Ltd.,
Parkway Works,
Sheffield S9 3BL.
Telephone: 0742 449066
Telex: 547139

SPECIAL PURPOSE SAWS

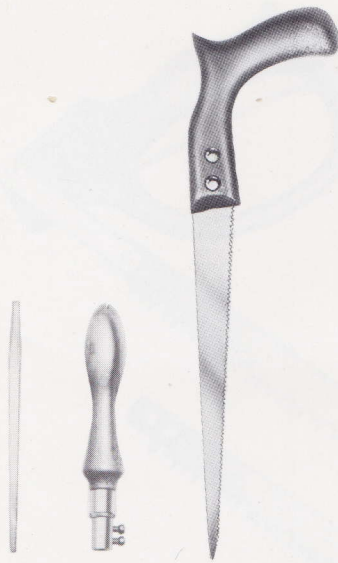

PAD SAW No. 20/A/C/F COMPASS SAW No. 21

All Pad and Compass blades are glazed and polished and manufactured from hardened and tempered Sheffield saw steel. Teeth are set and straight-through sharpened, and in the case of padsaw blades they are easily interchangeable within a polished beech handle.

The standard Padsaw is fitted with a 14 points per inch straight ground blade (No. 20) but alternatively the No. 20C, 10 points and No. 20F 16 points ground thin-to-back blades, sharpened and set, are available. Sizes (All types) 8" (200 mm), 9" (225 mm), 10" (250 mm), 11" (270 mm), 12" (300 mm).

No. 20A
Padsaw handle
Size 7" (175 mm)

The No. 21 Compass Saw has a permanently fixed handle of durable wood coloured plastic and is fitted with an 8 point blade. Size 12"

Individual sizes wrapped in sets of 10.



NEST OF SAWS No. 34

Our No. 34 Nest of Saws is supplied with three hardened and tempered Sheffield saw steel blades, each sharpened and set. The polished beech handle has a Wing nut fitting to facilitate quick changing of the blades.


Wrapped in sets of 5.

Interchangeable Blades No. 34B

Separate interchangeable blades in sets of three (12", 15" and 18") are also available for use with No. 34 Nest of Saws.

Size	Points per inch
12" (300mm)	10
15" (375mm)	8
18" (450mm)	7

Individually wrapped in sets of 3.

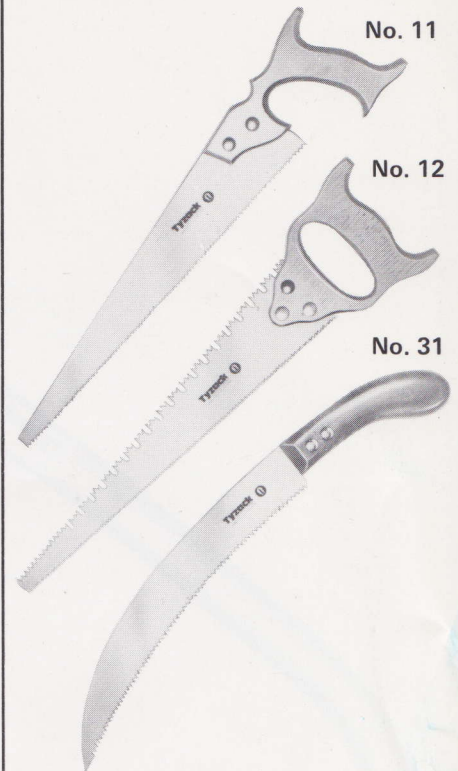

PRUNING SAWS

Three basic designs of pruning saw give your customers a wide choice to suit their particular requirements.

Each saw has a blade of hardened and tempered Sheffield saw steel, set and sharpened. A polished hardwood beech handle is used on the No. 11 which is open style. The No. 12 which has sharpened teeth on both edges is fitted with a closed style handle of polished hardwood beech, whilst the No. 31 has a classical "Grecian" handle of durable wood coloured plastic.

No. 11 Single Edge

7 points per inch.

Size
16" (400 mm)

No. 12 Double Edge

8 on top edge. 5½ interspersed with gullet teeth on bottom edge.

Size
16" (400 mm)

No. 31 Grecian

6 points per inch.

Size
14" (350 mm)

Individually wrapped.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

SPECIAL PURPOSE SAW



LOG SAW

For the discriminating user—and we believe the best quality log saw on the market.

A stove enamelled oval section rigid frame fitted with our patented combined grip guard and automatic tensioner. The glass-filled polypropylene guard is designed to give handsaw control, eliminate wobble and permit the use of the saw at any desired angle of cut whilst protecting the hand, right to the final stroke.

Cutting is faster because the blade cuts on both the push and pull strokes. Standard blades have teeth in series of four, designed and sharpened for easy two-way sawing, all cutting teeth set alternately. Raker blades have acutely sharp fleam teeth, interspaced with rakers to remove sawdust and reduce effort.

No. 48

Size	Tooth Pattern
------	---------------

24" (600 mm)	Standard
--------------	----------

30" (750 mm)	Standard
--------------	----------

No. 488

Size	Tooth Pattern
------	---------------

24" (600 mm)	Raker
--------------	-------

30" (750 mm)	Raker
--------------	-------

Spare Blades

No. 47

Size	Tooth Pattern
------	---------------

24" (600 mm)	Standard
--------------	----------

30" (750 mm)	Standard
--------------	----------

No. 477

Size	Tooth Pattern
------	---------------

24" (600 mm)	Raker
--------------	-------


30" (750 mm)	Raker
--------------	-------

Packed in cartons of 5.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

SPECIAL PURPOSE SAWS

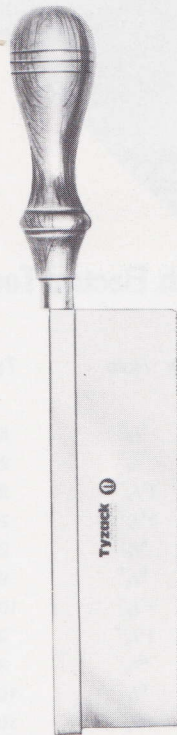


GENTS BACKSAW No. 130 and 131

A straight beech handled tenon saw with brass back (No. 130) or steel back with wood coloured plastic handle (No. 131) fitted to a Sheffield steel blade.

Size	Points per inch
6" (150mm)	15
7" (175mm)	15
8" (200mm)	15

Brass back packed in cartons of 6.
Blued steel back packed in cartons of 12.

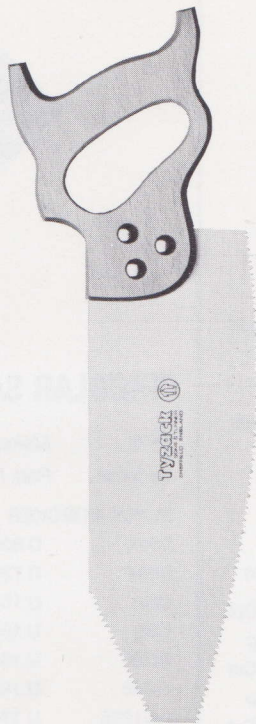

FLOORING SAW No. 151

A Sheffield steel blade hardened and tempered and fitted with a polished beech handle. Teeth are cut along both front and back edges and are hand set and straight through sharpened.

Size
12½" (312 mm)

Points per inch
8 on top edge with 5½ interspersed with gullet form on lower edge.


Packed in cartons of 6.



FRENCH BLOCK SCRAPER No. 50

A Curved Sheffield steel blade hardened and tempered and fitted with a hardwood beech handle.

Size
6¾" × 3¹⁵⁄₁₆" × .038"
Individually wrapped.

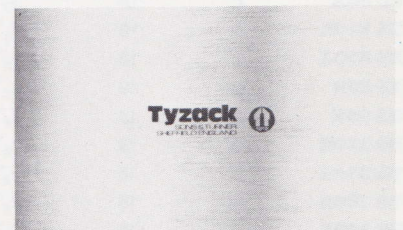

CABINET SCRAPER No. 49

This often overlooked tool in the sophisticated era of power sanders, is how the cabinet scraper has been described. Essential for the final hand working of knotty and difficult grained timbers. Available in three sizes from hardened and tempered Sheffield steel.


Sizes
4" × 2½" × .036"
5" × 2½" × .036"
6" × 3" × .036"

Individual sizes wrapped in sets of 10.



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL

CIRCULAR SAWS

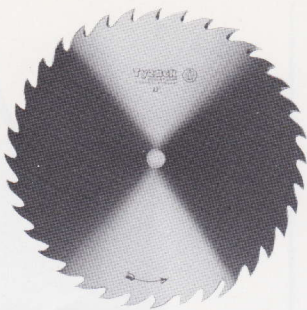


Tyzack circular saws are perfectly concentric, balanced blades, set, sharpened and ready for immediate use and with assured long life before re-sharpening becomes necessary. Available to suit the most popular machines from the leading makers and suitable for most types of D.I.Y. or industrial sawing operations.

Each saw blade up to 12" dia. is individually skin packed with an identification label. Larger sizes supplied with heavy-duty protective wrapping.

CIRCULAR SAWS FOR WOOD

T.S. & T.

Code No.	Diameter	Gauge	Hole	Teeth
TSS 44X	4"	19	1/4"	84 X Cut
TSS 58R	5"	18	1/2"	36 Rip
TSS 58X	5"	18	1/2"	84 X Cut
TSS 66R	6"	18	3/8"	36 Rip
TSS 66X	6"	18	3/8"	84 X Cut
TSS 68R	6"	18	1/2"	36 Rip
TSS 68X	6"	18	1/2"	84 X Cut
TSS 78R	7"	18	1/2"	36 Rip
TSS 78X	7"	18	1/2"	84 X Cut
TSS 710R	7"	18	5/8"	36 Rip
TSS 710X	7"	18	5/8"	84 X Cut
TSS 88R	8"	18	1/2"	36 Rip
TSS 88X	8"	18	1/2"	84 X Cut
TSS 810R	8"	18	5/8"	36 Rip
TSS 810X	8"	18	5/8"	84 X Cut
TSS 98R	9"	18	1/2"	36 Rip
TSS 98X	9"	18	1/2"	84 X Cut
TSS 910R	9"	18	5/8"	36 Rip
TSS 910X	9"	18	5/8"	84 X Cut
TSS 108R	10"	18	1/2"	36 Rip
TSS 108X	10"	18	1/2"	84 X Cut
TSS 1010R	10"	18	5/8"	36 Rip
TSS 1010X	10"	18	5/8"	84 X Cut
TSS 1212R	12"	16	3/4"	36 Rip
TSS 1212X	12"	16	3/4"	84 X Cut
TSS 1216R	12"	16	1"	36 Rip
TSS 1216 X	12"	16	1"	84 X Cut
TSS 1454	14"	16	3/4"	54 Rip
TSS 1464	14"	16	3/4"	64 X Cut
TSS 1654	16"	15	3/4"	54 Rip
TSS 1854	18"	14	1"	54 Rip
TSS 2054	20"	13	1"	54 Rip
TSS 2254	22"	13	1"	54 Rip
TSS 2454	24"	12	1 1/4"	54 Rip
TSS 2455	24"	12	1 1/2"	54 Rip
TSS 2456	24"	12	1 1/2" x 5/16" x 3/8"	54 Rip
TSS 2654	26"	12	1 1/4"	54 Rip
TSS 2854	28"	12	1 1/4"	54 Rip
TSS 3054	30"	11	1 1/4"	54 Rip
TSS 3055	30"	11	1 1/2"	54 Rip
TSS 3056	30"	11	1 1/2" x 5/16" x 3/8"	54 Rip

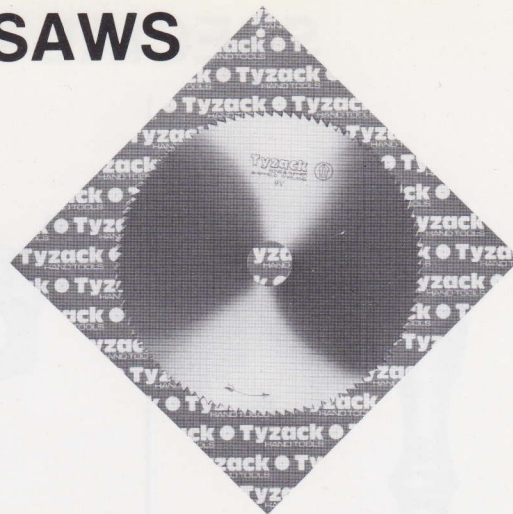


CIRCULAR SAWS For use with Electric Tools

To fit Machine	Makers Patt. No.	T.S. & T. Code No.	Diameter	Hole	Teeth
BLACK & DECKER					
D984	D.8002	TBD11	5"	1/2"	80 X Cut
D984	D.7881	TBD12	5"	1/2"	24 Gullet
U62	U.1602	TBD14	6 1/8"	1 1/8"	80 X Cut
U62	U.1600	TBD15	6 1/8"	1 1/8"	20 Gullet
GD50	U.1620	TBD22	6 1/2"	5/8"	20 Gullet
GD50	U.1622	TBD23	6 1/2"	5/8"	90 X Cut
HD1205	U.1702	TBD16	7 1/4"	1 1/8"	100 X Cut
HD1205	U.1700	TBD17	7 1/4"	1 1/8"	24 Gullet
GD60	U.1720	TBD32	7 1/4"	5/8"	24 Gullet
GD60	U.1722	TBD33	7 1/4"	5/8"	100 X Cut
U80	U.1802	TBD18	8 1/4"	1 3/8"	100 X Cut
U80	U.1800	TBD19	8 1/4"	1 3/8"	30 Gullet
HD1215	U.1902	TBD20	9 1/4"	1 3/8"	100 X Cut
HD1215	U.1900	TBD21	9 1/4"	1 3/8"	36 Gullet
STANLEY BRIDGES					
	STD.412	TB25	6"	3/8"	114 Hand Saw
	STD.313	TB26	6"	3/8"	30 Gullet
Nu-Rip	STD.462	TB27	6"	3/8"	16 Gullet
Husky	STD.1006	TB28	6"	1/2"	30 Gullet
Husky	STD.1008	TB29	6"	1/2"	114 Hand Saw
HD273	83318	TB32	7"	5/8"	100 X Cut
HD273	83320	TB33	7"	5/8"	24 Gullet
HD85	83333	TB35	8"	5/8"	30 Gullet
89	ST.150/1	TB36	9"	5/8"	36 Gullet
89	10774	TB37	9"	5/8"	112 X Cut
MULTICO					
Saw Bench		TM54	10"	1/2"	Gullet
Saw Bench		TM55	10"	1/2"	Hand Saw
WOLF					
Safety Master	13247	TW9	6"	1/2"	30 Gullet
Safety Master	13248	TW10	6"	1/2"	108 X Cut
No. SS.65	14770	TW38	6 9/16"	5/8"	106 X Cut
Portable Electric Saw	14769	TW39	6 9/16"	5/8"	20 Gullet
	23606	TW40	9 1/4"	1 1/8"	30 Gullet
	23607	TW41	9 1/4"	1 1/8"	100 X Cut
	23381	TW42	9 1/4"	5/8"	100 X Cut



RECORD RIDGWAY TOOLS LTD. PARKWAY WORKS,
SHEFFIELD S9 3BL



Second Highway Tools Ltd.
Parkway Works
Sheffield S8 3SL
Telephone: 0742 445088
Telex: 547732



Record Ridgway Tools Ltd.,
Parkway Works,
Sheffield S9 3BL.

Telephone: 0742 449066

Telex: 547139

